



SOLAR MODULE 270 W



EFFICIENCY

High Module Conversion Efficiencies




EASY & QUICK

Easy Installation and Handling



MECHANICAL LOAD

Heavy snow load up to 5400 Pa, Wind load up to 2400 Pa

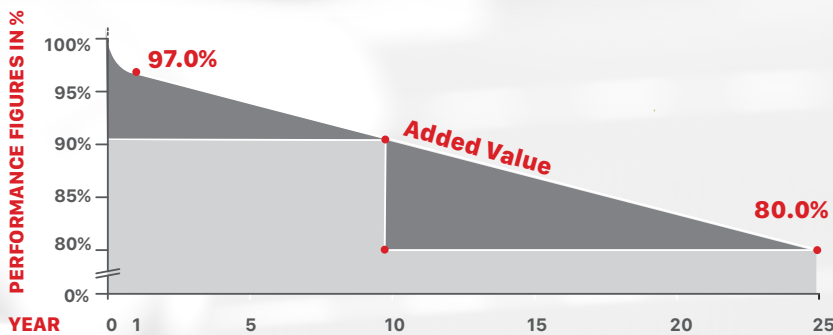

CERTIFICATES:



IREX ENERGY JOINT STOCK COMPANY

Add: No 47, Le Van Thinh Street, Quarter 5, Binh Trung Dong Ward, District 2, HCMC, Vietnam
Tel: (+84.28) 7300 1559 | **Fax:** (+84.28) 6255 8093 | **Email:** info@irex.vn | **Website:** irex.vn
Factory: No. 1A Street, Phu My 1 Industrial Zone, Tan Thanh District, Ba Ria - Vung Tau Province, Vietnam
Tel: (+84.254) 392 3594 | **Fax:** (+84.254) 392 3594





www.irex.vn



156 SERIES - 60 CELLS POLYCRYSTALLINE



PERFORMANCE

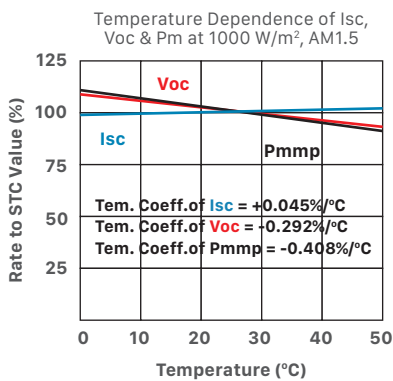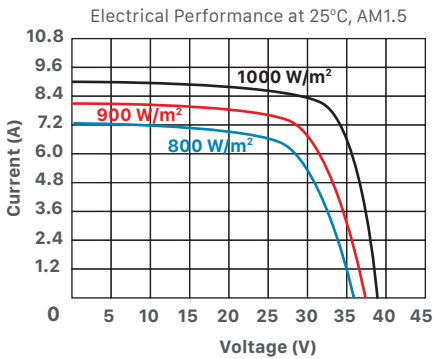

STRUCTURE

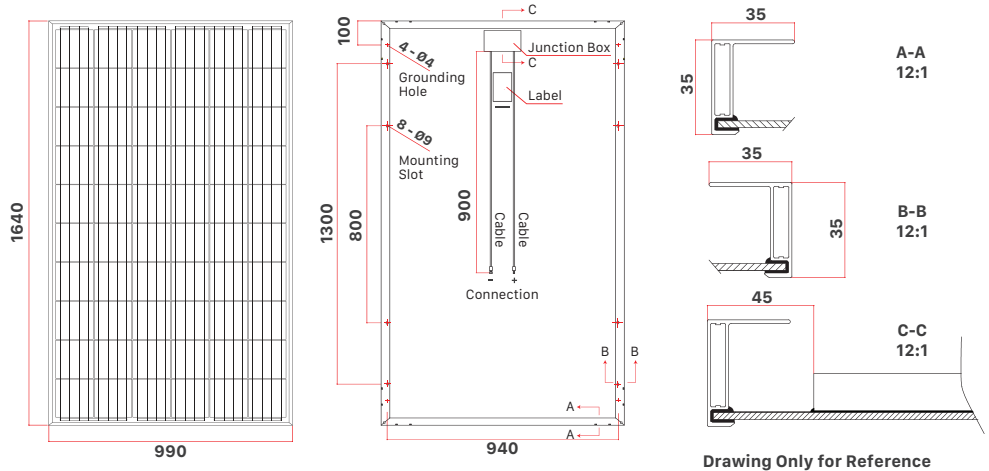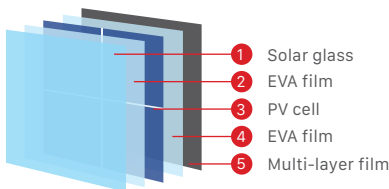

Drawing Only for Reference

ELECTRICAL CHARACTERISTICS STC

IR270P-60

Maximum Power (Pmax)	270 W
Power Tolerance	0 ~ 3%
Module Efficiency	16.6 %
Maximum Power Current (Imp)	8.61 A
Maximum Power Voltage (Vmp)	31.36 V
Short Circuit Current (Isc)	9.12 A
Open Circuit Voltage (Voc)	38.89 V

Values at Standard Test Conditions

(STC: Air Mass AM 1.5, Irradiance 1000 W/m², Cell Temperature 25°C)

ELECTRICAL CHARACTERISTICS NOCT

IR270P-60

Maximum Power (Pmax)	194.00 W
Maximum Power Current (Imp)	6.67 A
Maximum Power Voltage (Vmp)	28.71 V
Short Circuit Current (Isc)	7.26 A
Open Circuit Voltage (Voc)	35.93 V

Values at Nominal Operating Cell Temperature

(NOCT: Wind speed 1 m/s, Irradiance 800 W/m², Cell Temperature 45°C, Ambient Temperature 20°C)

MECHANICAL CHARACTERISTICS

Cell Type	156.75 x 156.75 mm Polycrystalline, 60 (6x10) pcs in series
Solar Glass	High Transmission, Low Iron, Tempered Glass with Anti-Reflective Coating
Frame	Anodized Aluminum Alloy type 6063 - T5
Junction Box	Rated current ≥ 15A, IP ≥ 67, TUV & UL
Dimension	1640 x 990 x 35 mm
Output Cable	4 mm² (EU)/12 AWG (US), 900 mm
Weight	19 kg
Installation hole Location	See Drawing Above

PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	12	28	28
Pieces per Container	360	840	896

MAXIMUM RATINGS

Operating Temperature	- 40°C ~ + 85°C
Maximum System Voltage	1500 VDC (IEC) / 1500 VDC (UL)
Maximum Series Fuse Rating	20 A (IEC) / 20 A (UL)