


72 CELLS-MONOCRYSTALLINE

SOLAR MODULE
370 W



- ADVANCED PERC CELL TECHNOLOGY**
 Absorbing more light, High module efficiency
 Low breakage rate, Annual power degradation 0.7%
- FAST & SAFE**
 Easy installation and handling
 Environmentally friendly
- MODULE DURABILITY**
 5400 Pa snow load, 2400 Pa wind load
 Ideal for PV rooftops, ground mount, floating
- THE #1 DOMESTIC PV MANUFACTURER IN VIETNAM**
 100% Automatic production line
 International quality PV technology

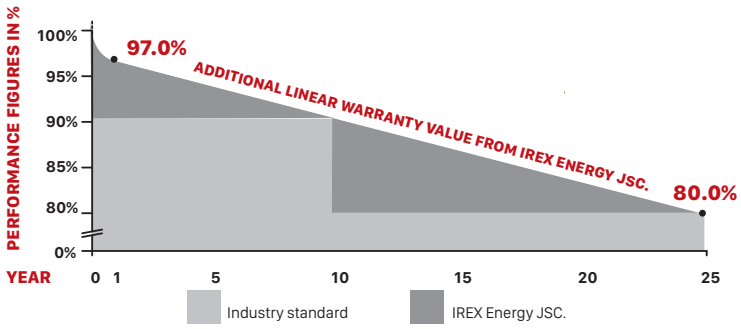

Munich RE

12 - years
Material & workmanship

25 - years
Linear power Output

CERTIFICATES



- IEC 61215:** Terrestrial photovoltaic (PV) modules – Design qualification and type approval
- IEC 61730:** Photovoltaic (PV) module safety qualification
- UL 1703, ULC/ORD-C1703:2018:** Standard for Flat-Plate Photovoltaic Modules and Panels
- IS 14286:2010:** Crystalline Silicon Terrestrial Photovoltaic (PV) Modules - Design Qualification and Type Approval
- IEC 61701:** Salt mist corrosion testing of PV Modules
- IEC 62716:** Photovoltaic modules - Ammonia corrosion testing
- ISO 9001:2015:** Quality Management System
- ISO 14001:2015:** Environmental Management System

HIGH QUALITY FOR PROSPERITY

IREX Energy Joint Stock Company produces the #1 Vietnamese-Made Photovoltaic (PV) modules, internationally certified with excellent performance and flexible in customization per demand.

Going solar requires a long-term commitment. For this, all our solar modules are insured by MunichRe, world's best reinsurance provider. You can sit back, relax and enjoy the sunshine; as our company and warranty partner will always be with you in 25 years!



With the finest price and customer service can only be found at IREX Joint Stock Company, we look forward to working with you soon!

IREX ENERGY JOINT STOCK COMPANY

Head Office: No. 47, Le Van Thinh Street, Quarter 5, Binh Trung Dong Ward, District 2, HCMC, Vietnam
Factory Address: Road No. 1A, Phu My 1 Industrial Zone, Tan Phuoc Ward, Phu My Town, Ba Ria - Vung Tau Province, Vietnam
Tel: +84-28-7300-1559 | **Email:** info@irex.vn | **Website:** www.irex.vn
Fax HCMC: +84-28-7300-6760 | **Fax IREX Factory:** +84-254-2923-594



PERFORMANCE

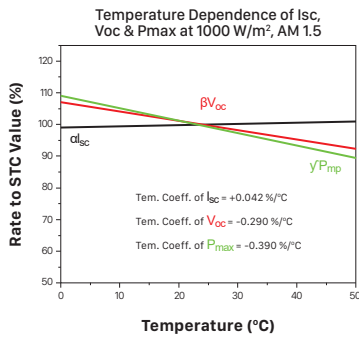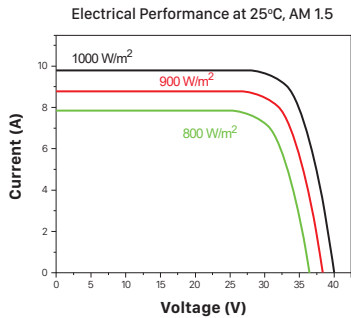

ELECTRICAL CHARACTERISTICS STC


IRM72S-370

Maximum Power (P_{max})	370 W
Power Tolerance	0 ~ 3 %
Module Efficiency	19.11 %
Maximum Power Current (I_{mp})	9.45 A
Maximum Power Voltage (V_{mp})	39.16 V
Short Circuit Current (I_{sc})	10 A
Open Circuit Voltage (V_{oc})	48.49 V
Module Fire Performance	Type 1 (UL 1703) or Class C (IEC 61730)
Values at Standard Test Conditions	
(STC: AM 1.5 Spectrum, Irradiance of 1000 W/m², Cell Temperature 25°C)	

ELECTRICAL CHARACTERISTICS NMOT

IRM72S-370

Maximum Power (P_{max})	270 W
Maximum Power Current (I_{mp})	7.46 A
Maximum Power Voltage (V_{mp})	36.20 V
Short Circuit Current (I_{sc})	8 A
Open Circuit Voltage (V_{oc})	45.03 V
Values at Nominal Module Operating Temperature	
(NMOT: AM 1.5 Spectrum, Irradiance of 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s)	

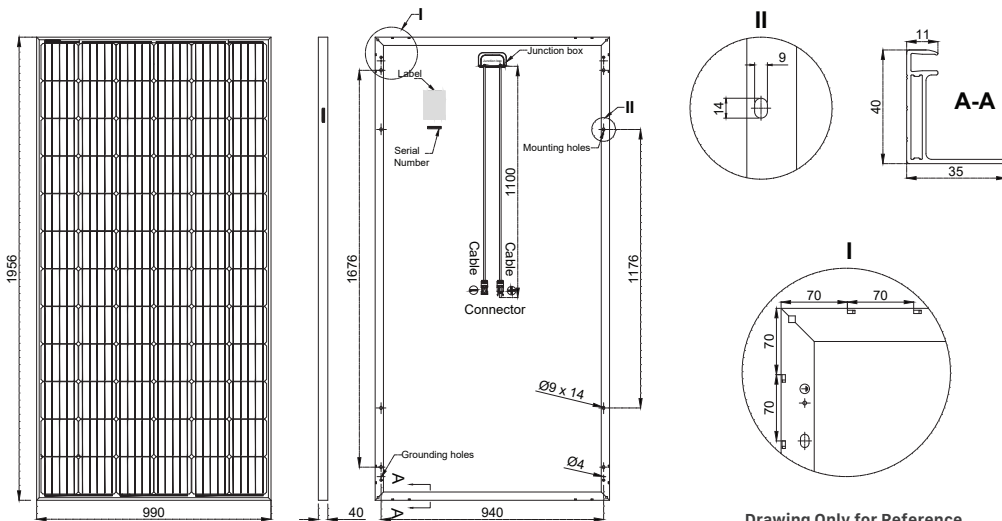

Drawing Only for Reference

MECHANICAL CHARACTERISTICS

Cell Type	156.75 x 156.75 mm Monocrystalline, 72 (6 x 12) pcs in series
Front Cover	3.2 mm High Transmission, Low Iron, Tempered Glass with Anti-Reflective Coating
Back Cover	Composite film
Frame	Anodized Aluminum Alloy type 6063 - T5 (Silver/ Black)
Junction Box	3 bypass diodes, IP 68 rated in accordance with IEC 62790
Dimension	1956 x 990 x 40 mm
Output Cable	4 mm² (IEC)/ 12 AWG (UL), 1100 mm in accordance with IEC 62852
Weight	22 kg (approx)
Connector	MC4 Compatible

PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	10	24	24
Pieces per Container	270	648	696

OPERATING CONDITIONS

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500 VDC (IEC)/ 1500 VDC (UL)
Maximum Series Fuse Rating	20 A (IEC)/ 20 A (UL)
NMOT	45°C ± 2°C
Application Class	Class A