



SOLAR MODULE 330 W



EFFICIENCY

High Module Conversion Efficiencies




EASY & QUICK

Easy Installation and Handling



MECHANICAL LOAD

Heavy snow load up to 5400 Pa, Wind load up to 2400 Pa

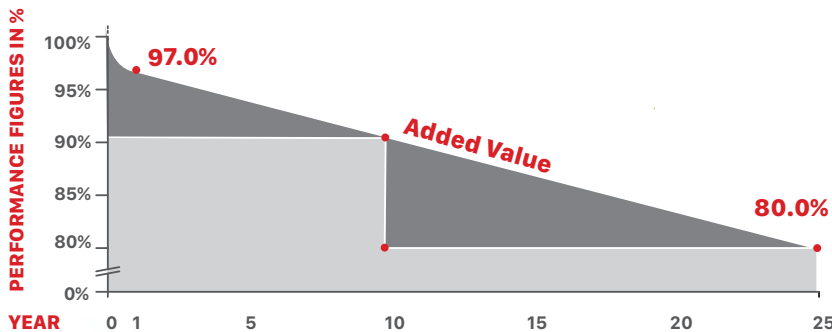

CERTIFICATES



PHOTOVOLTAIC MODULE OVER 600 VOLTS
E496023



Management System
ISO 9001:2015

www.tuv.com
ID 9105011675

UL 1703: Standard for Flat - Plate Photovoltaic Modules and Panels

IEC 61701: Salt mist corrosion testing of PV Modules

IEC 62716: Photovoltaic modules - Ammonia corrosion testing

IEC 61215: Crystalline silicon terrestrial PV Modules - Design qualification and type approval

IEC 61730: 1 and 2 - PV module safety qualification

IREX ENERGY JOINT STOCK COMPANY

Add: No 47, Le Van Thinh Street, Quarter 5, Binh Trung Dong Ward, District 2, HCMC, Vietnam

Tel: (+84.28) 7300 1559 | **Fax:** (+84.28) 7300 6760 | **Email:** info@irex.vn | **Website:** irex.vn

Factory: Road No. 1A, Phu My 1 Industrial Zone, Phu My Ward, Phu My Town, Ba Ria - Vung Tau Province, Vietnam

Tel: (+84.254) 392 3594 | **Fax:** (+84.254) 392 3594





www.irex.vn



156 SERIES - 72 CELLS POLYCRYSTALLINE



PERFORMANCE

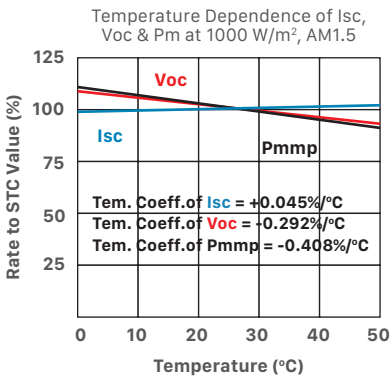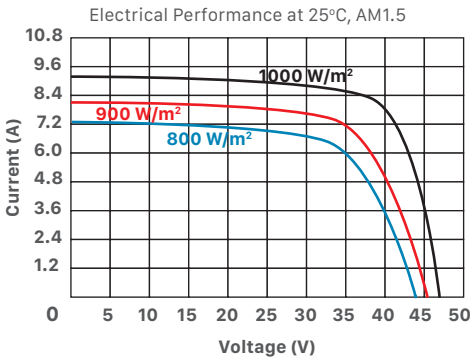

STRUCTURE

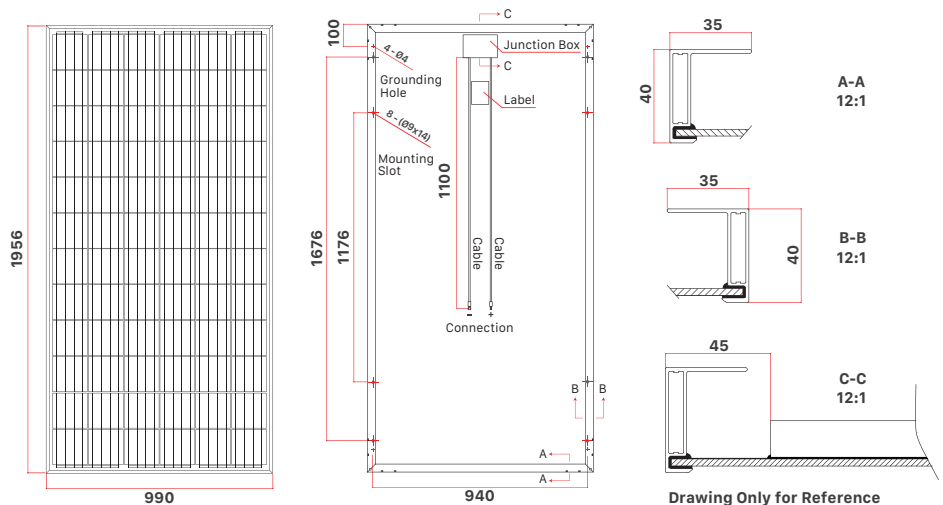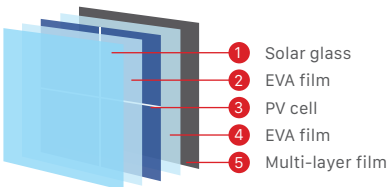

MECHANICAL CHARACTERISTICS

Cell Type	156.75 x 156.75 mm Polycrystalline, 72 (6x12) pcs in series
Solar Glass	High Transmission, Low Iron, Tempered Glass with Anti-Reflective Coating
Frame	Anodized Aluminum Alloy type 6063 - T5
Junction Box	Rated current ≥ 15A, IP ≥ 67, TUV & UL, 3 diodes
Dimension	1956 x 990 x 40 mm
Output Cable	4 mm ² (EU)/12 AWG (US), 1100 mm
Weight	22 kg
Installation hole Location	See Drawing Above

PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	10	24	24
Pieces per Container	260	624	672

WORKING CONDITION

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500 VDC (IEC) / 1500 VDC (UL)
Maximum Series Fuse Rating	20 A (IEC) / 20 A (UL)
NOCT	45 ± 2
Application Class	Class A

ELECTRICAL CHARACTERISTICS STC

IR330P-72

Maximum Power (Pmax)	330 W
Power Tolerance	0 ~ 3%
Module Efficiency	17.1%
Maximum Power Current (Imp)	8.68 A
Maximum Power Voltage (Vmp)	38.02 V
Short Circuit Current (Isc)	9.23 A
Open Circuit Voltage (Voc)	47.02 V
Values at Standard Test Conditions (STC: Air Mass AM 1.5, Irradiance 1000 W/m², Cell Temperature 25°C)	

ELECTRICAL CHARACTERISTICS NOCT

IR330P-72

Maximum Power (Pmax)	241.00 W
Maximum Power Current (Imp)	6.90 A
Maximum Power Voltage (Vmp)	34.94 V
Short Circuit Current (Isc)	7.46 A
Open Circuit Voltage (Voc)	43.78 V
Values at Nominal Operating Cell Temperature (NOCT: Wind speed 1 m/s, Irradiance 800 W/m², Ambient Temperature 20°C)	