

SOLAR MODULE  
**395 W**

**72 CELLS-MONOCRYSTALLINE**



**ADVANCED PERC CELL TECHNOLOGY**

Absorbing more light, High module efficiency  
Low breakage rate, Annual power degradation 0.7%



**FAST & SAFE**

Easy installation and handling  
Environmentally friendly




**MODULE DURABILITY**

5400 Pa snow load, 2400 Pa wind load  
Ideal for PV rooftops, ground mount, floating



**THE #1 DOMESTIC PV MANUFACTURER IN VIETNAM**

100% Automatic production line  
International quality PV technology

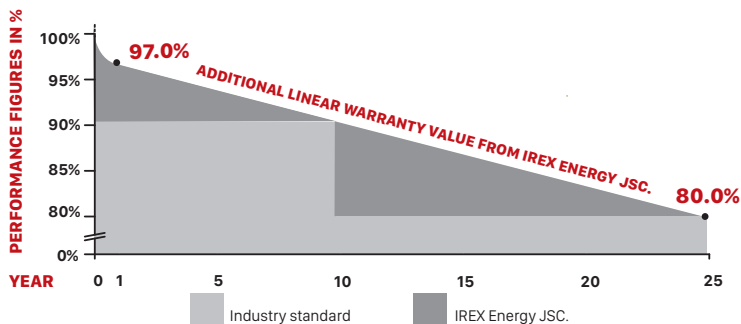

**Munich RE**

**12 - years**  
Material & workmanship

**25 - years**  
Linear power Output

**HIGH QUALITY FOR PROSPERITY**

IREX Energy Joint Stock Company produces the #1 Vietnamese-Made Photovoltaic (PV) modules, internationally certified with excellent performance and flexible in customization per demand.

Going solar requires a long-term commitment. For this, all our solar modules are insured by MunichRe, world's best reinsurance provider. You can sit back, relax and enjoy the sunshine; as our company and warranty partner will always be with you in 25 years!

With the finest price and customer service can only be found at IREX Joint Stock Company, we look forward to working with you soon!

**CERTIFICATES**



ID 44 100 20 94 0003



ISO 14001:2015  
Environmental Management System  
ems.com.au  
AN: 51410994M4

**ISO 9001:2015:** Quality Management System

**ISO 14001:2015:** Environmental Management System


**IREX ENERGY JOINT STOCK COMPANY**

**Head Office:** No. 47, Le Van Thinh Street, Quarter 5, Binh Trung Dong Ward, District 2, HCMC, Vietnam  
**Factory Address:** Road No. 1A, Phu My 1 Industrial Zone, Tan Phuoc Ward, Phu My Town, Ba Ria - Vung Tau Province, Vietnam  
**Tel:** +84-28-7300-1559 | **Email:** info@irex.vn | **Website:** www.irex.vn  
**Fax HCMC:** +84-28-7300-6760 | **Fax IREX Factory:** +84-254-2923-594







## PERFORMANCE

Electrical Performance at 25°C, AM 1.5

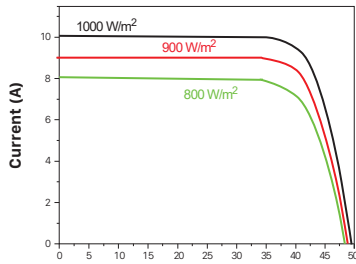

Temperature Dependence of  $I_{sc}$ ,  $V_{oc}$  &  $P_{max}$  at 1000 W/m², AM 1.5

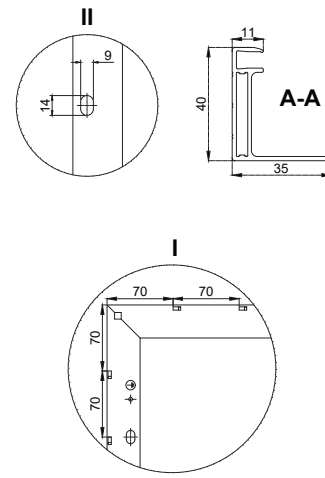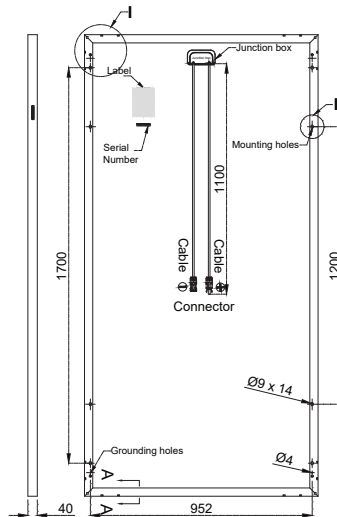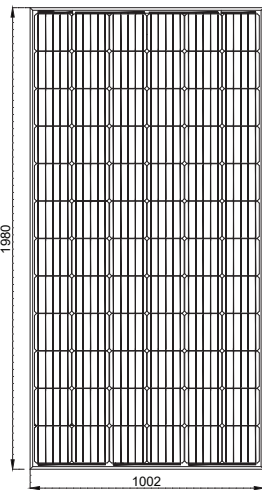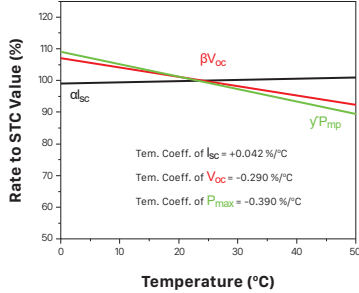

Drawing Only for Reference

## ELECTRICAL CHARACTERISTICS STC

IRM72S-395

Maximum Power ( $P_{max}$ )	395 W
Power Tolerance	0 ~ 3 %
Module Efficiency	19.91 %
Maximum Power Current ( $I_{mp}$ )	9.38 A
Maximum Power Voltage ( $V_{mp}$ )	42.12 V
Short Circuit Current ( $I_{sc}$ )	9.97 A
Open Circuit Voltage ( $V_{oc}$ )	49.03 V
Values at Standard Test Conditions (STC: AM 1.5 Spectrum, Irradiance of 1000 W/m², Cell Temperature 25°C)	

## ELECTRICAL CHARACTERISTICS NMOT

IRM72S-395

Maximum Power ( $P_{max}$ )	312.05 W
Maximum Power Current ( $I_{mp}$ )	7.49 A
Maximum Power Voltage ( $V_{mp}$ )	41.70 V
Short Circuit Current ( $I_{sc}$ )	7.97 A
Open Circuit Voltage ( $V_{oc}$ )	48.54 V
Values at Nominal Module Operating Temperature (NMOT: AM 1.5 Spectrum, Irradiance of 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s)	

## MECHANICAL CHARACTERISTICS

Cell Type	158.75 x 158.75 mm Monocrystalline, 72 (6 x 12) pcs in series
Front Cover	3.2 mm High Transmission, Low Iron, Tempered Glass with Anti-Reflective Coating
Back Cover	Composite film
Frame	Anodized Aluminum Alloy type 6063 - T5 (Silver/ Black)
Junction Box	3 bypass diodes, IP 68 rated in accordance with IEC 62790
Dimension	1980 x 1002 x 40 mm
Output Cable	4 mm² (IEC)/ 12 AWG (UL), 1100 mm in accordance with IEC 62852
Weight	23 kg (approx)
Connector	MC4 Compatible

## PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	10	22	22
Pieces per Container	270	594	638

## OPERATING CONDITIONS

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500 VDC
Maximum Series Fuse Rating	20 A
NMOT	45°C ± 2°C
Application Class	Class A