

SOLAR MODULE 340 W

IREX
a member of SolarSK

72 CELLS-POLYCRYSTALLINE



ADVANCED PERC CELL TECHNOLOGY

Absorbing more light, High module efficiency
Low breakage rate, Annual power degradation 0.7%



FAST & SAFE

Easy installation and handling
Environmentally friendly




MODULE DURABILITY

5400 Pa snow load, 2400 Pa wind load
Ideal for PV rooftops, ground mount, floating



THE #1 DOMESTIC PV MANUFACTURER IN VIETNAM

100% Automatic production line
International quality PV technology

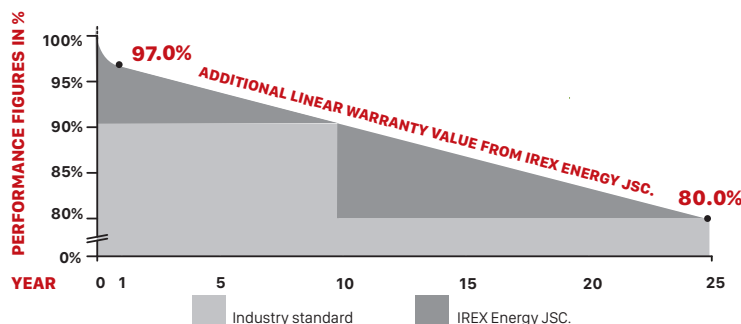

Munich RE

12 - years
Material & workmanship

25 - years
Linear power Output

CERTIFICATES



ISO 14001: 2015
Environmental Management System
gms.com.au
AN: 5141999AMA

IEC 61215: Terrestrial photovoltaic (PV) modules – Design qualification and type approval
IEC 61730: Photovoltaic (PV) module safety qualification
UL 1703, ULC/ORD-C1703:2018: Standard for Flat-Plate Photovoltaic Modules and Panels
IS 14286:2010: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules - Design Qualification and Type Approval
IEC 61701: Salt mist corrosion testing of PV Modules
IEC 62716: Photovoltaic modules - Ammonia corrosion testing
ISO 9001:2015: Quality Management System
ISO 14001:2015: Environmental Management System

HIGH QUALITY FOR PROSPERITY

IREX Energy Joint Stock Company produces the #1 Vietnamese-Made Photovoltaic (PV) modules, internationally certified with excellent performance and flexible in customization per demand.

Going solar requires a long-term commitment. For this, all our solar modules are **insured by MunichRe**, world's best reinsurance provider. You can sit back, relax and enjoy the sunshine; as our company and warranty partner will **always be with you in 25 years!**






With the **finest price and customer service** can only be found at IREX Joint Stock Company, we look forward to working with you soon!

IREX ENERGY JOINT STOCK COMPANY

Head Office: No. 47, Le Van Thinh Street, Quarter 5, Binh Trung Dong Ward, District 2, HCMC, Vietnam
Factory Address: Road No. 1A, Phu My 1 Industrial Zone, Tan Phuoc Ward, Phu My Town, Ba Ria - Vung Tau Province, Vietnam
Tel: +84-28-7300-1559 | **Email:** info@irex.vn | **Website:** www.irex.vn
Fax HCMC: +84-28-7300-6760 | **Fax IREX Factory:** +84-254-2923-594



PERFORMANCE

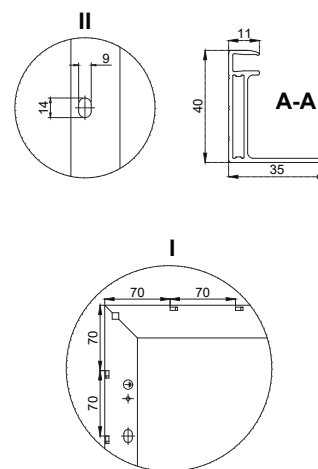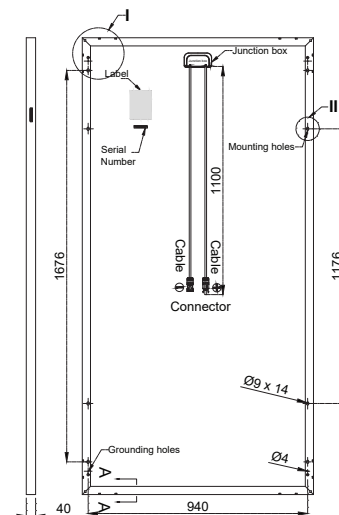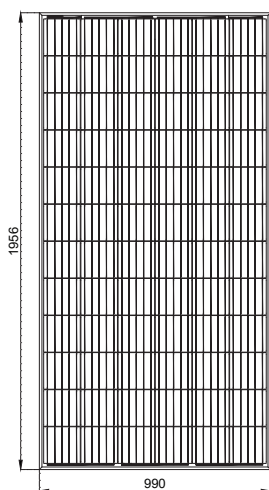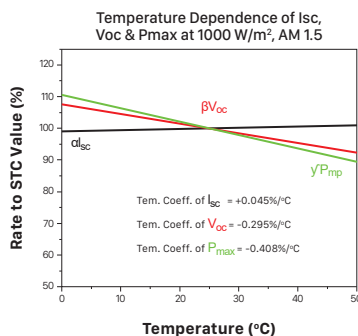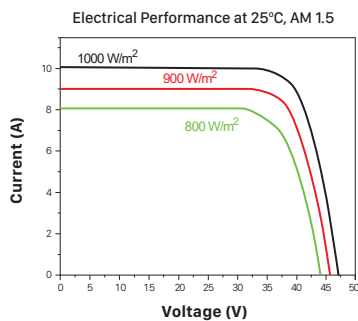

Drawing Only for Reference

MECHANICAL CHARACTERISTICS

Cell Type
 Front Cover
 Back Cover
 Frame
 Junction Box
 Dimension
 Output Cable
 Weight
 Connector

157 x 157 mm Polycrystalline, 72 (6 x 12) pcs in series
 3.2 mm High Transmission, Low Iron, Tempered Glass with Anti-Reflective Coating
 Composite film
 Anodized Aluminum Alloy type 6063 - T5 (Silver/ Black)
 3 bypass diodes, IP 68 rated in accordance with IEC 62790
 1956 x 990 x 40 mm
 4 mm² (IEC)/ 12 AWG (UL), 1100 mm in accordance with IEC 62852
 22 kg (approx)
 MC4 Compatible

PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	10	24	24
Pieces per Container	270	648	696

OPERATING CONDITIONS

Operating Temperature
 Maximum System Voltage
 Maximum Series Fuse Rating
 NMOT
 Application Class

-40°C ~ +85°C
 1500 VDC (IEC)/ 1500 VDC (UL)
 20 A (IEC)/ 20 A (UL)
 45°C ± 2°C
 Class A

ELECTRICAL CHARACTERISTICS STC

IRP72S-340

Maximum Power (P_{max})	340 W
Power Tolerance	0 ~ 3 %
Module Efficiency	17.56 %
Maximum Power Current (I_{mp})	8.91 A
Maximum Power Voltage (V_{mp})	38.17 V
Short Circuit Current (I_{sc})	9.45 A
Open Circuit Voltage (V_{oc})	47.41 V
Module Fire Performance	Type 1 (UL 1703) or Class C (IEC 61730)
Values at Standard Test Conditions	
(STC: AM 1.5 Spectrum, Irradiance of 1000 W/m², Cell Temperature 25°C)	

ELECTRICAL CHARACTERISTICS NMOT

IRP72S-340

Maximum Power (P_{max})	248 W
Maximum Power Current (I_{mp})	7.05 A
Maximum Power Voltage (V_{mp})	35.18 V
Short Circuit Current (I_{sc})	7.62 A
Open Circuit Voltage (V_{oc})	44.06 V
Values at Nominal Module Operating Temperature	
(NMOT: AM 1.5 Spectrum, Irradiance of 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s)	